


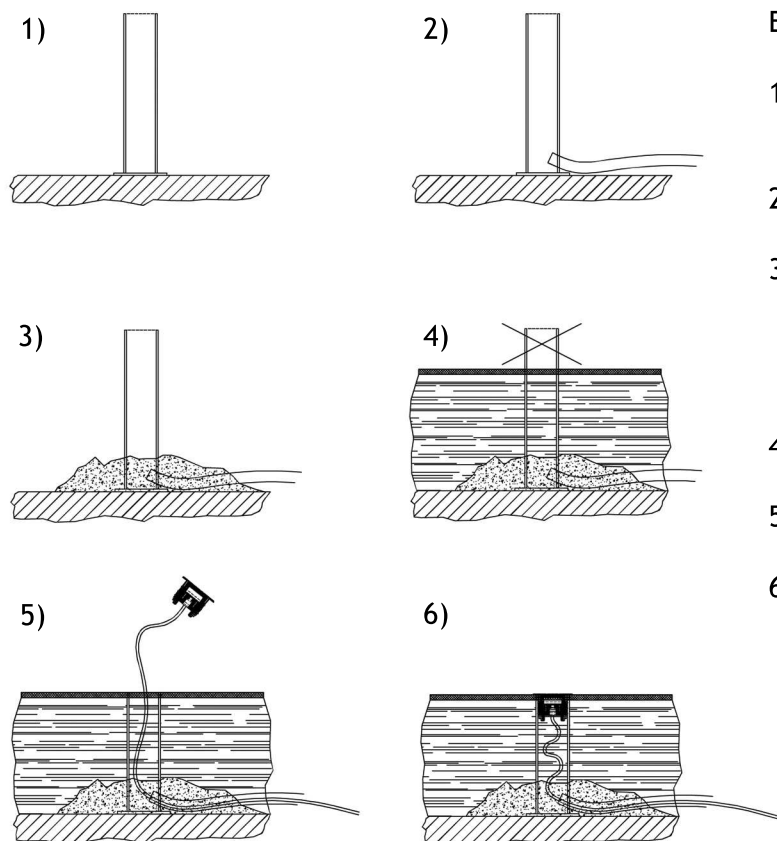

Easy installation system guide for led spot:

- 1) Place the installation housing on the immature soil.
- 2) Connect the electric tube to the housing.
- 3) Fix the housing with cement (rapid hardening when possible)
Take care that the housing is in a perfect vertical position.
- 4) Cut the installation housing flush to the finished floor.
- 5) Make the cable connections
- 6) Insert the LED spot into the installation housing.
Connect the LED driver to the LED spot and to the 230V AC supply.

Led spot model selection table:

Top grade spot with Weltec Dualproof© technology IP68							
Art. Number	Light Color	Cover plate	Power supply	Power consumption	Cable length standard	IP grade	Max Lumen
WTF55IP68RDP-WW	Warm white 2700K	Rectangle	12V DC	3,5 Watt	5m	68	270
WTF55IP68RDP-NW	Neutral white 4200K	Rectangle	12V DC	3,5 Watt	5m	68	270
WTF55IP68RDP-W	Cold white 6000K	Rectangle	12V DC	3,5 Watt	5m	68	288
WTF55IP68RDP-RGB	RGB full color with controller or following colors without controller: red, green, blue, yellow, violet, turquoise, cold white.	Rectangle	12V DC	2,0 Watt (white)	5m	68	-
WTF55IP68CDP-WW	Warm white 2700K	Circular	12V DC	3,5 Watt	5m	68	270
WTF55IP68CDP-NW	Neutral white 4200K	Circular	12V DC	3,5 Watt	5m	68	270
WTF55IP68CDP-W	Cold white 6000K	Circular	12V DC	3,5 Watt	5m	68	288
WTF55IP68CDP-RGB	RGB full color with controller or following colors without controller: Red, green, blue, yellow, violet, turquoise, cold white.	Circular	12V DC	2,0 Watt (white)	5m	68	-

Top grade spot IP67							
WTF55IP67RHP15-WW	Warm white 2700K / 15°	Rectangle	350 mA	4,5 Watt	5m	67	323
WTF55IP67RHP15-W	Warm white 5000-10000K / 15°	Rectangle	350 mA	4,5 Watt	5m	67	376
WTF55IP67RHP25-WW	Warm white 2700K / 25°	Rectangle	350 mA	4,5 Watt	5m	67	323
WTF55IP67RHP25-W	Warm white 5000-10000K / 25°	Rectangle	350 mA	4,5 Watt	5m	67	376
WTF55IP67CHP15-WW	Warm white 2700K / 15°	Circular	350 mA	4,5 Watt	5m	67	323
WTF55IP67CHP15-W	Warm white 5000-10000K / 15°	Circular	350 mA	4,5 Watt	5m	67	376
WTF55IP67CHP25-WW	Warm white 2700K / 25°	Circular	350 mA	4,5 Watt	5m	67	323
WTF55IP67CHP25-W	Warm white 5000-10000K / 25°	Circular	350 mA	4,5 Watt	5m	67	376

Contact:

Weltec s.n.c. / o.h.g.
Pontives, 17
39040 Lajon (BZ)
ITALY

Phone: 0039 0471 786 100
email: info@weltec.it
web: www.weltec.it